
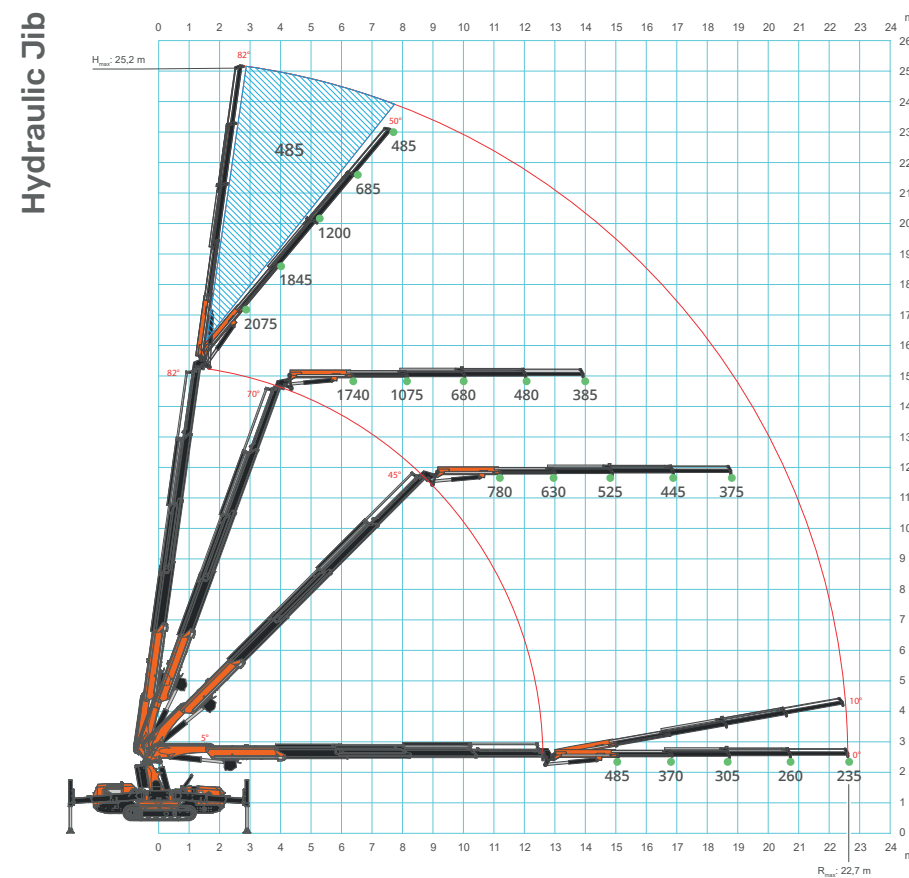


LOAD CHARTS

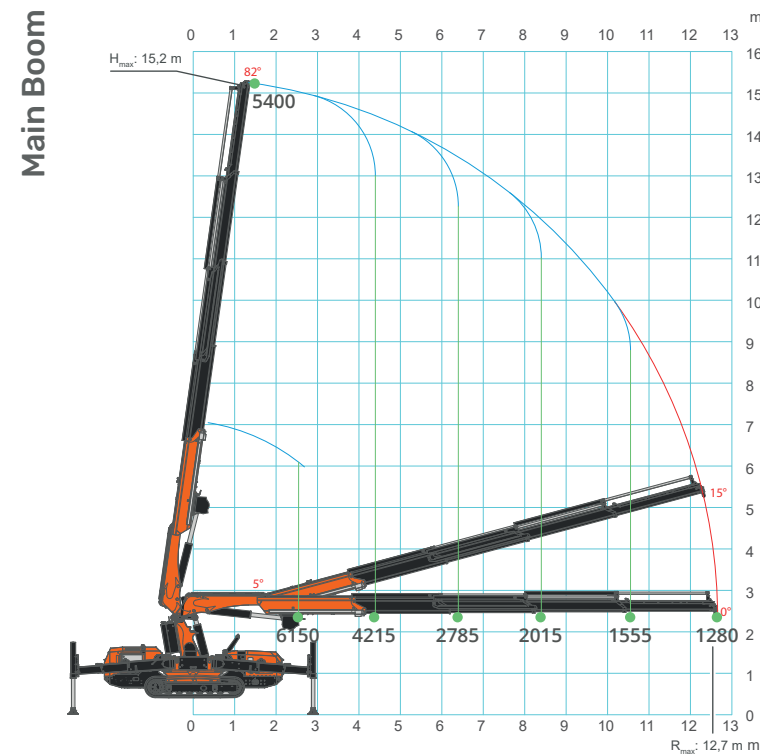

TOOLS AVAILABLE

HYDRAULIC JIB

2075 kg SWL



MAN BASKET

1 or 2 people




GLASS MANIPULATOR

800 kg SWL - JVM800R




SEARCHER HOOK

5500 kg SWL

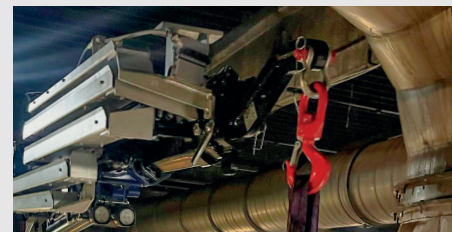

MECHANICAL EXTENSIONS

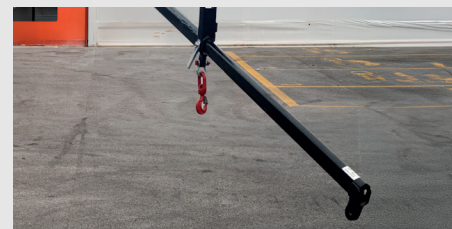

JF235

DIESEL BI-ENERGY



Lifting capacity

6150 kg



Max tip height

25,0 m



Dimensions (l x w x h)

4910 x 1600 x 2490 mm



Powered by

Bi-Energy

Diesel + Electric Power Pack



Weight

9470 kg



EN [m - kg]



JF235
DIESEL BI-ENERGY

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com
Specifications are subject to change without notice.
All data provided is for reference purposes only and is not legally binding.

V25.06

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

J-Link
Works With
Trackunit

FEATURES



3 BOOM ARTICULATIONS

- Higher boom versatility
- Pass-over obstacles
- Negative angle operation



INTUITIVE USER INTERFACE

Radio control

- Optimized usability
- Improved layout

Touch display

- 7" IP66 heavy duty
- Live stability area
- Crane assistant onboard
- Self-diagnostics & troubleshooting

VERSATILE STABILITY CONFIGURATIONS

- Stepless outriggers rotation 0°/45°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Asymmetric configuration




ENDLESS CRANE CONFIGURATIONS

- Hook** - 6150 kg capacity
- Winch**
 - 1500 kg capacity single fall / 3000 kg 2 falls
 - 40 m rope
- Hydraulic jib** - 2075 kg capacity
 - Hook or winch mode
 - 11,0 m length fully extended
 - Hydraulic lines for tools
- Independent hydraulic tools** - Easy connection for any tool


DIESEL BI-ENERGY POWERED

- Diesel engine:** 33 kW Kubota
 - Variable Speed Engine Management: low consumption, low noise, faster crane movements
 - Eco/Normal/Power working modes
 - DPF filter with automatic managment
- Electric Power Pack ***
 - On board motor: 100% electric operation
 - Emission-free and noise-free indoor operation
 - Threephase motors for every Country

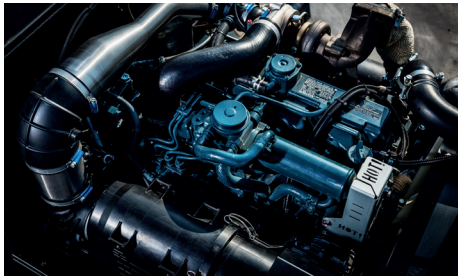

MAN BASKET

- Up to 25,3 m height
- Single or two people
- Self-levelling, rotation and height adjustment
- Aluminium, steel or fiberglass
- EN280 certified

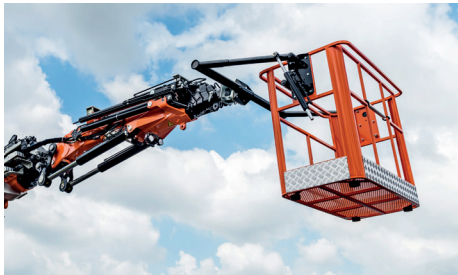


J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units




EASY TRANSPORT

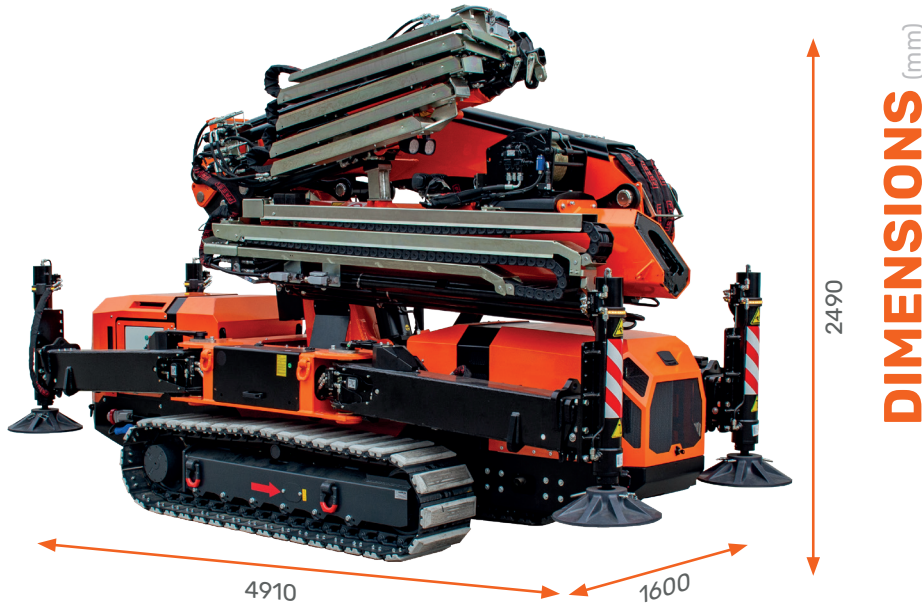

DIMENSIONS (mm)

STABILITY AREA (mm)

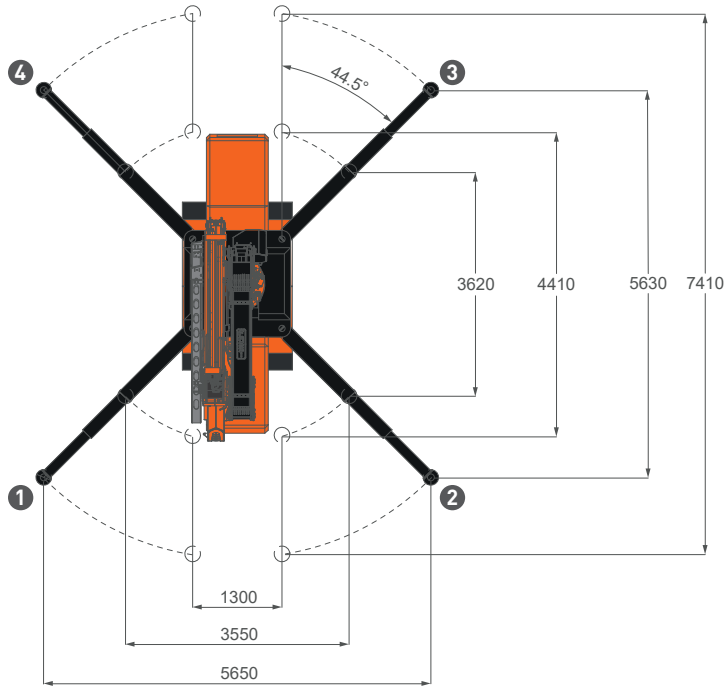

COMPACT FOOTPRINT

